



WEATHER COVER

Installation instructions & information

Art. no.: 189-99-02535



INSTRUCTIONS




CONFIGURATOR

Edition: 29 September 2025
VELO DE VILLE
AT-Zweirad GmbH
Zur Steinkuhle 2
48341 Altenberge
Germany


These instructions describe the installation and use of the **VELO DE VILLE LOADY** weather cover on the **VELO DE VILLE LOADY**.

ALWAYS use threadlocker when fitting screws. Preferably in the form of **LOCTITE 243**.


Contents:

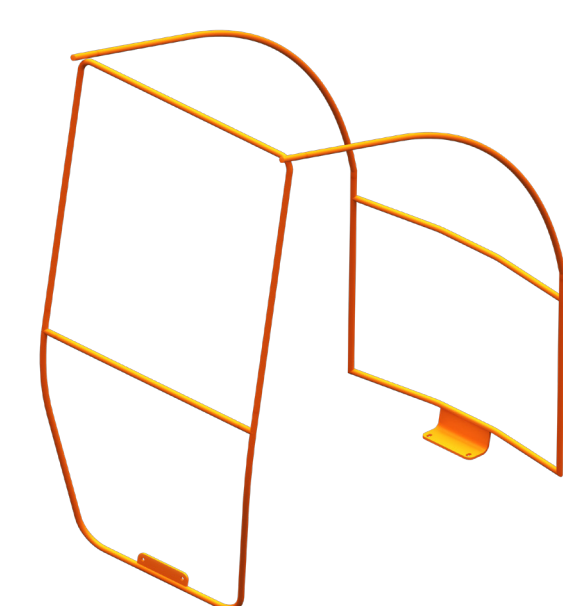

1x frame
(5 segments)

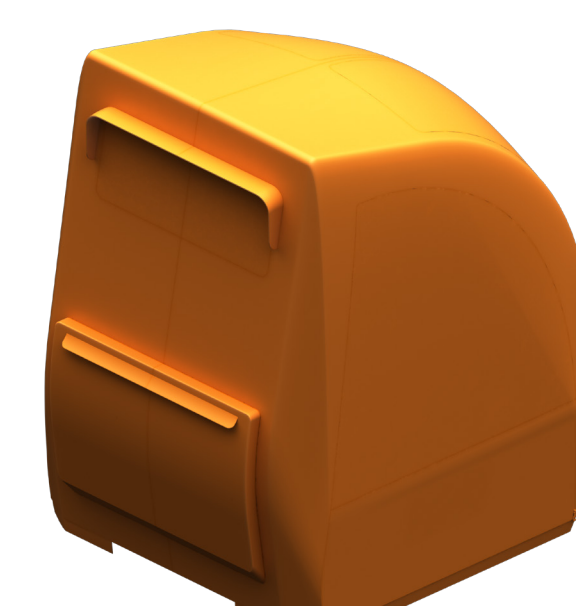


1x WEATHER
COVER

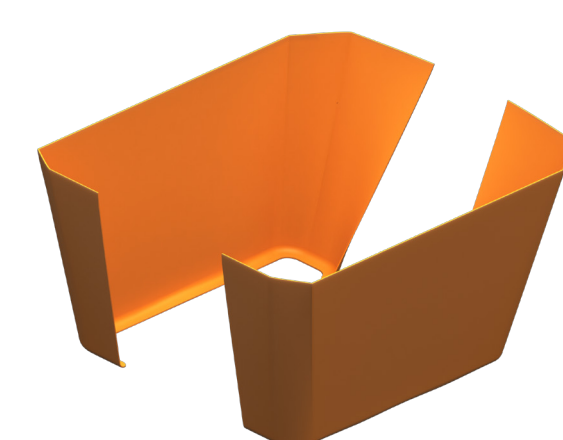


2x lower protection
(left & right)

Screws
ISO 7380-2
2x M6 x 16 mm


Self-locking nuts
DIN 6926
2x M6

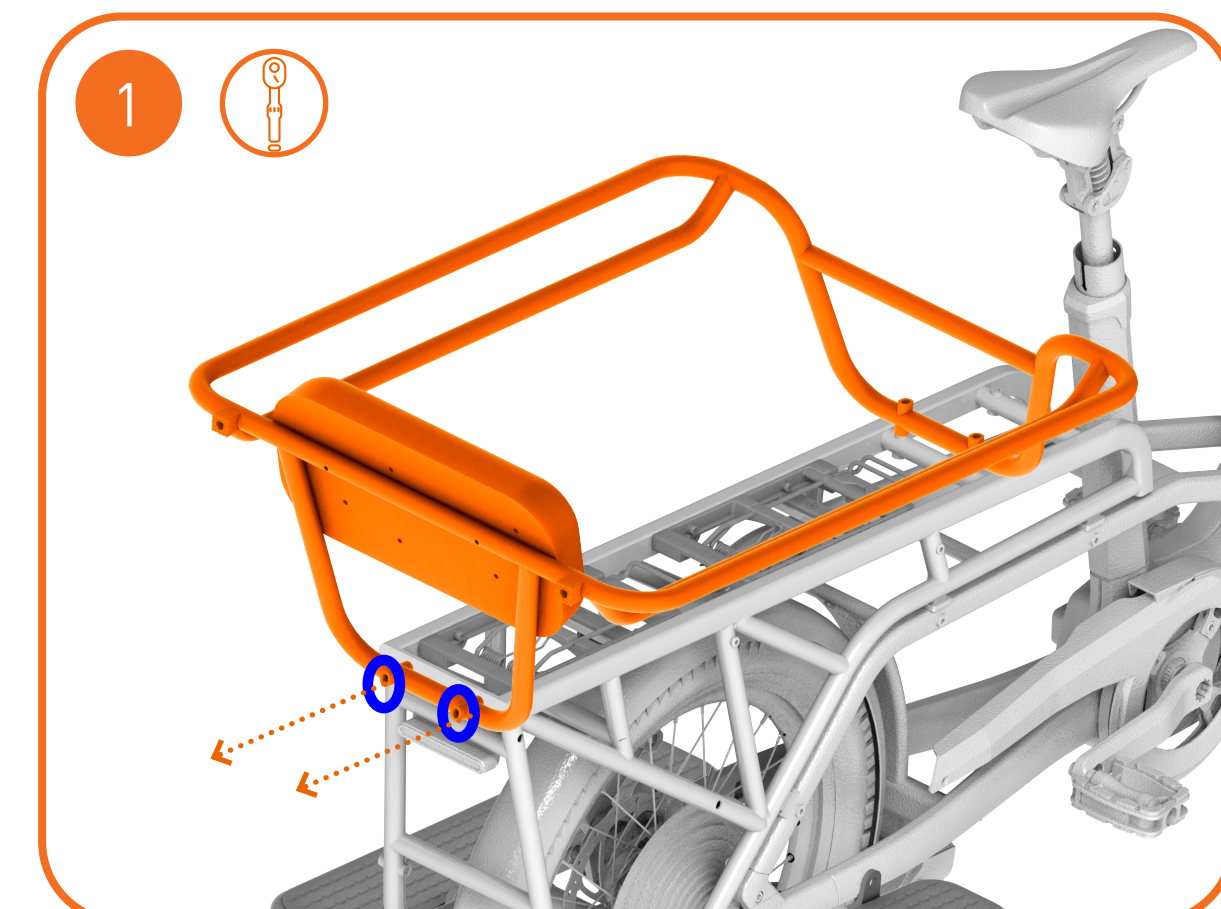


Loosen the rear screws of the ride bar.

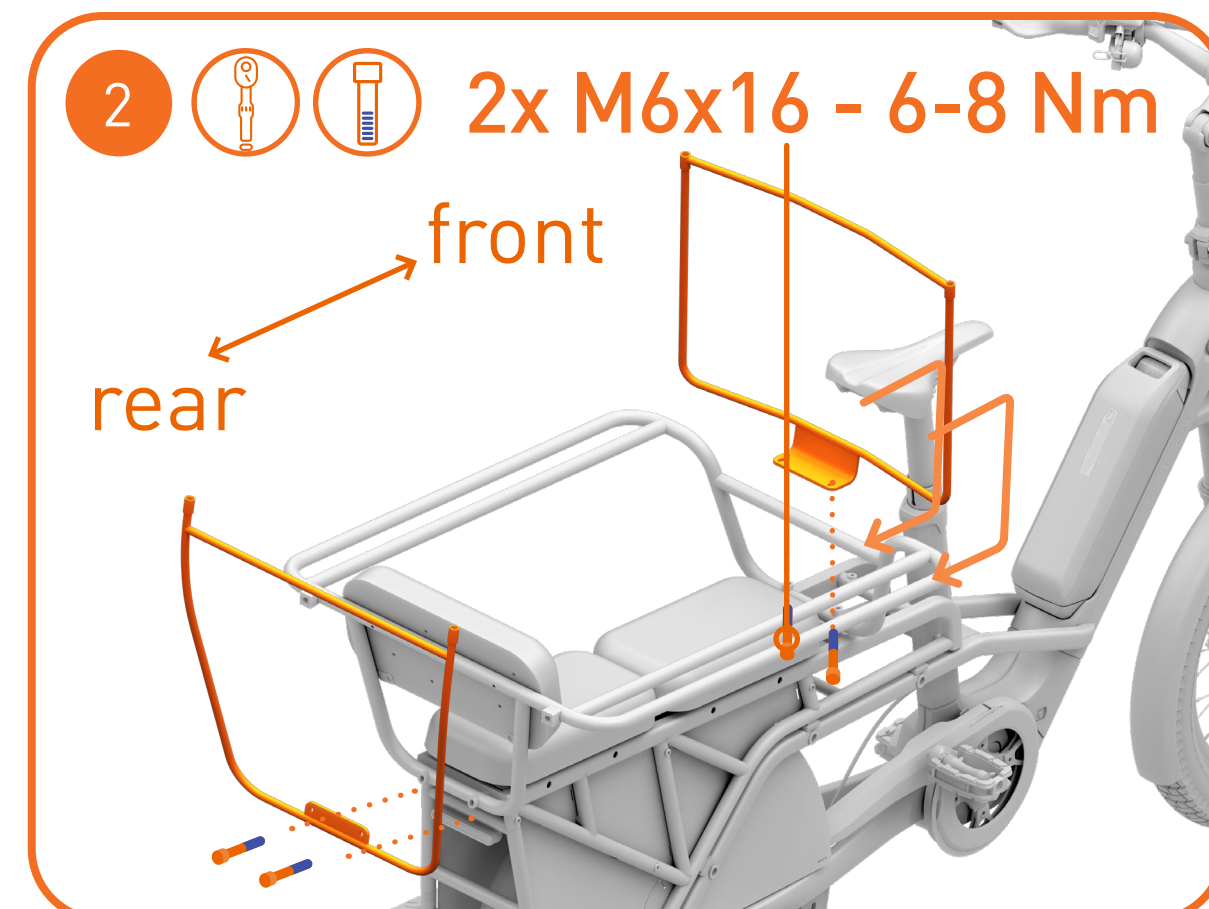


Fit the end segments of the frame. Use the screws supplied at the front and the screws already fitted at the rear.

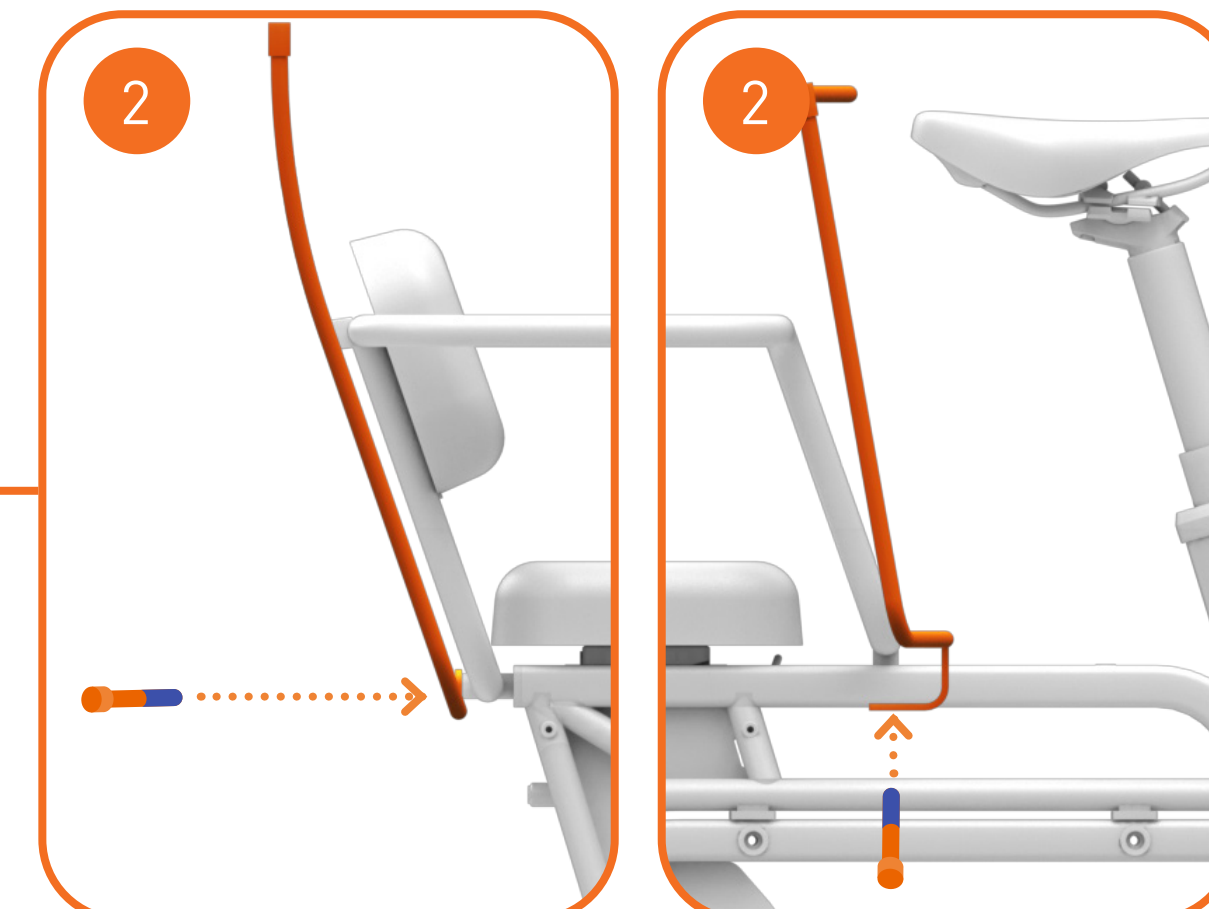


Make sure that the mounting plate of the frame segment is positioned **UNDER** the ride bar at the front. The mounting plate is positioned in front at the rear.

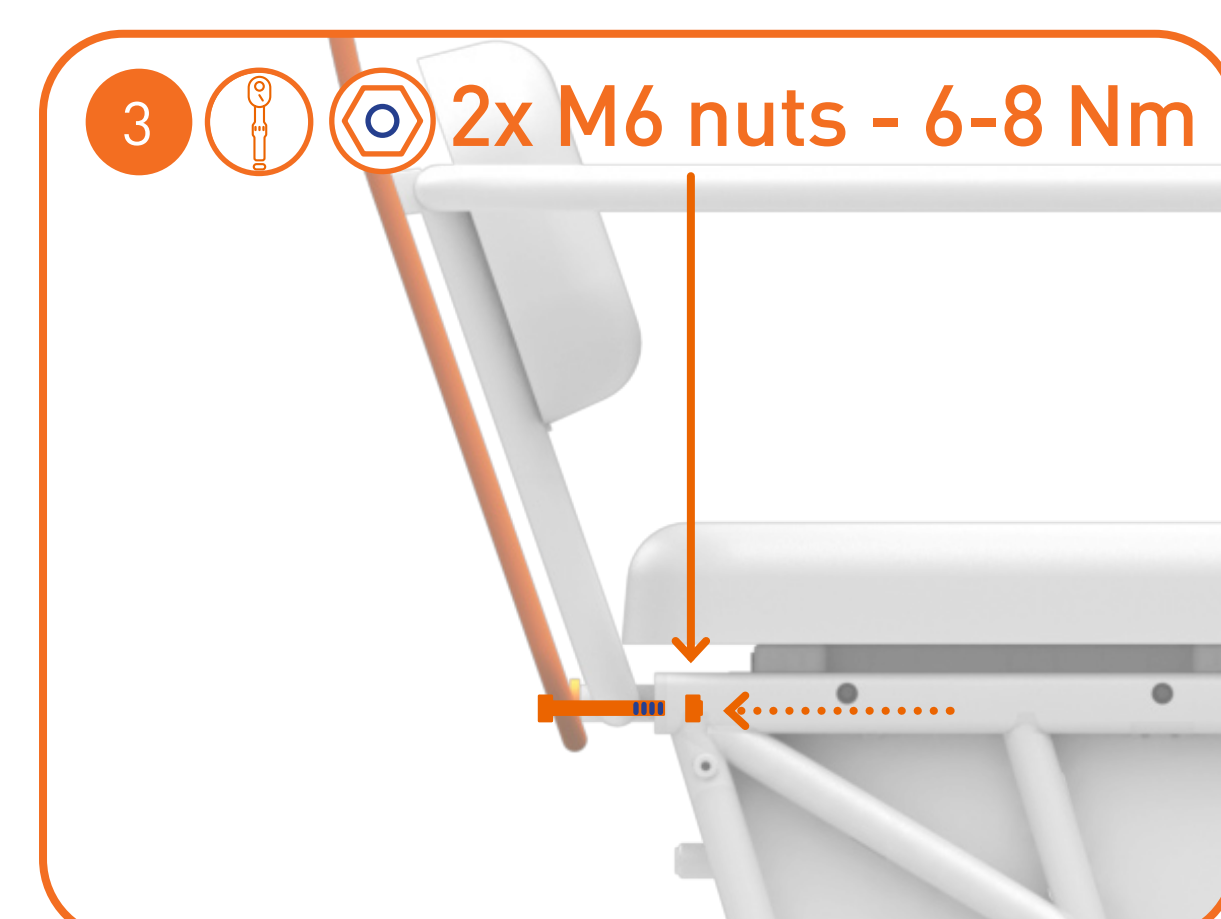


Make sure that the screws are tightened correctly. **Then** fit the M6 nuts from the inside. You can remove the seat cushion for ease of access.

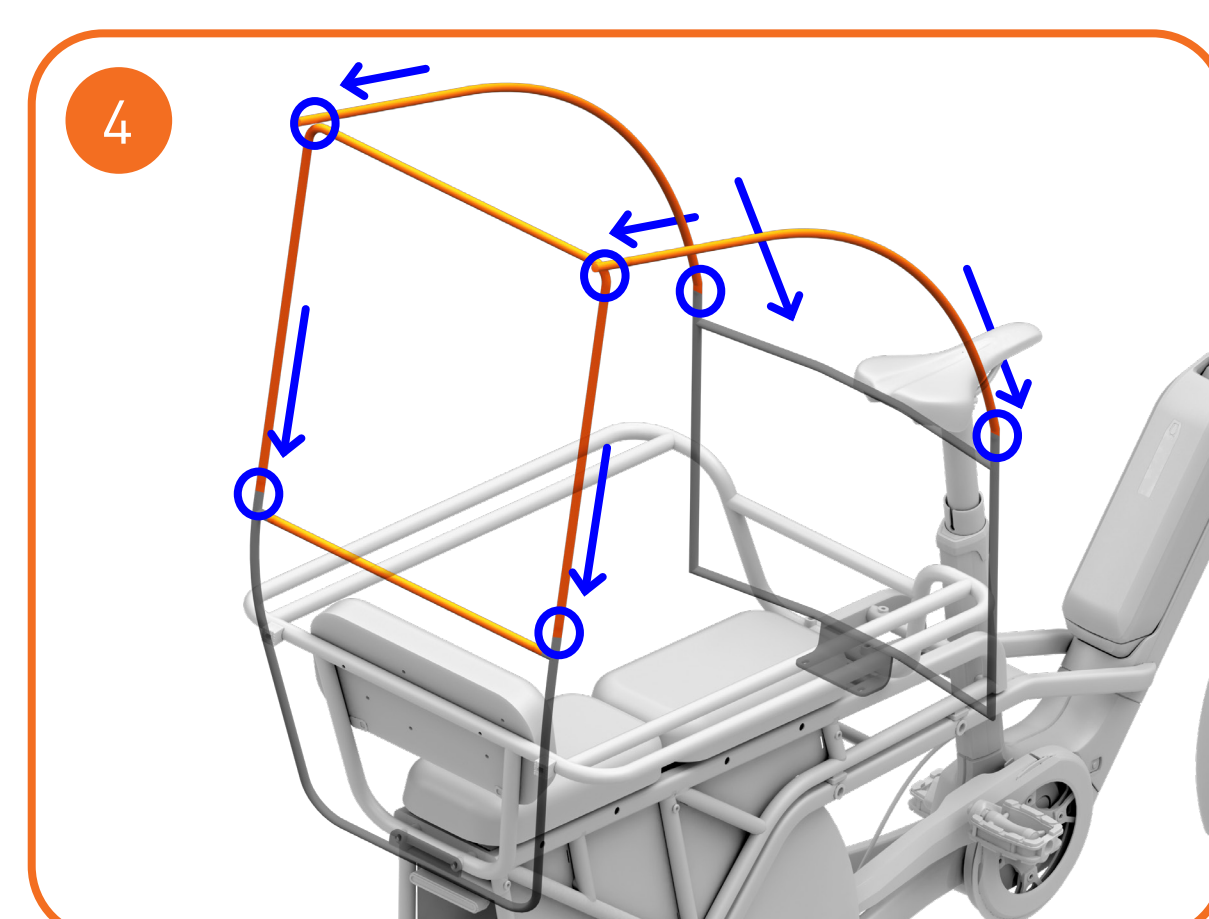



Now fit the remaining segments of the frame by joining them together.

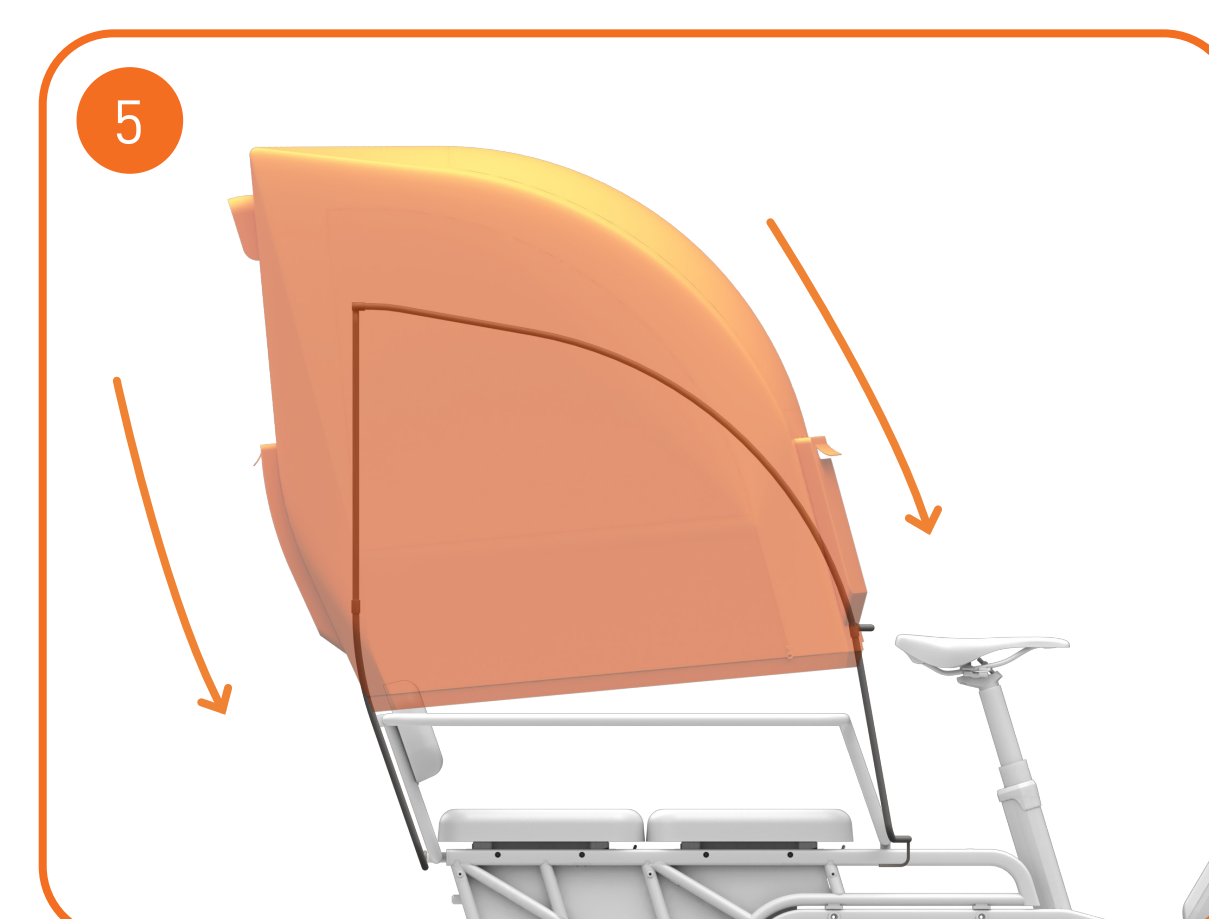


Then pull the **WEATHER COVER** tightly over the frame.

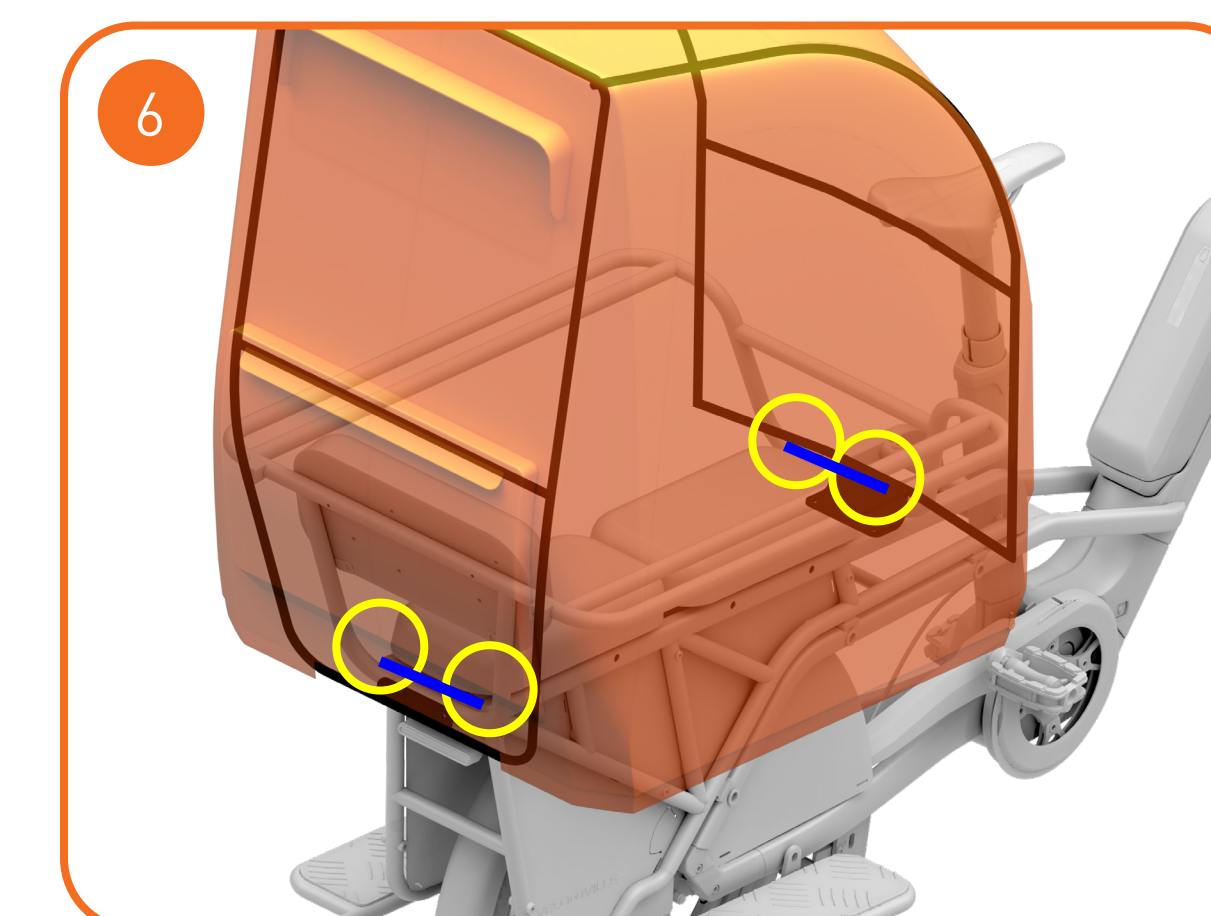


Attach the weather cover to the frame using the Velcro straps **BELOW** the **crossbars** of the rear luggage rack

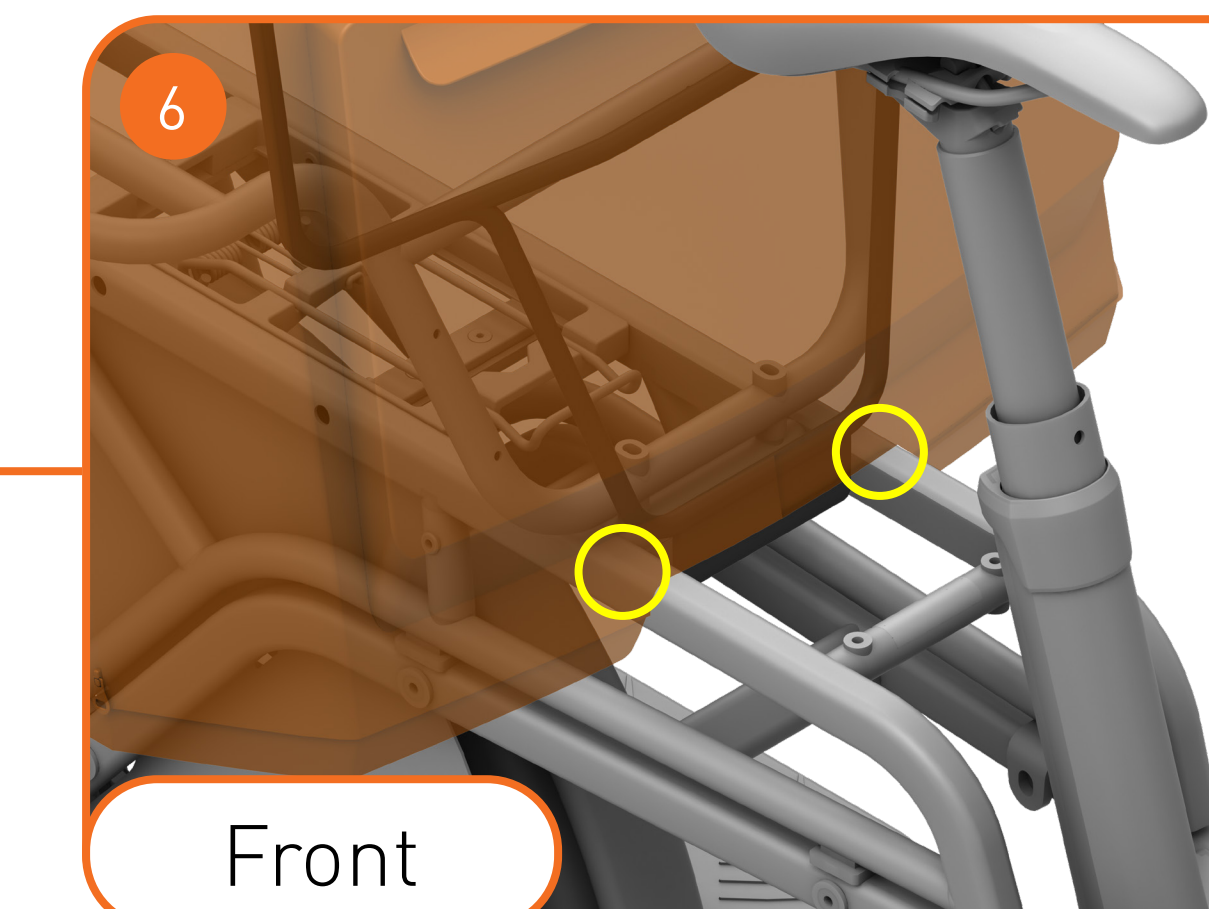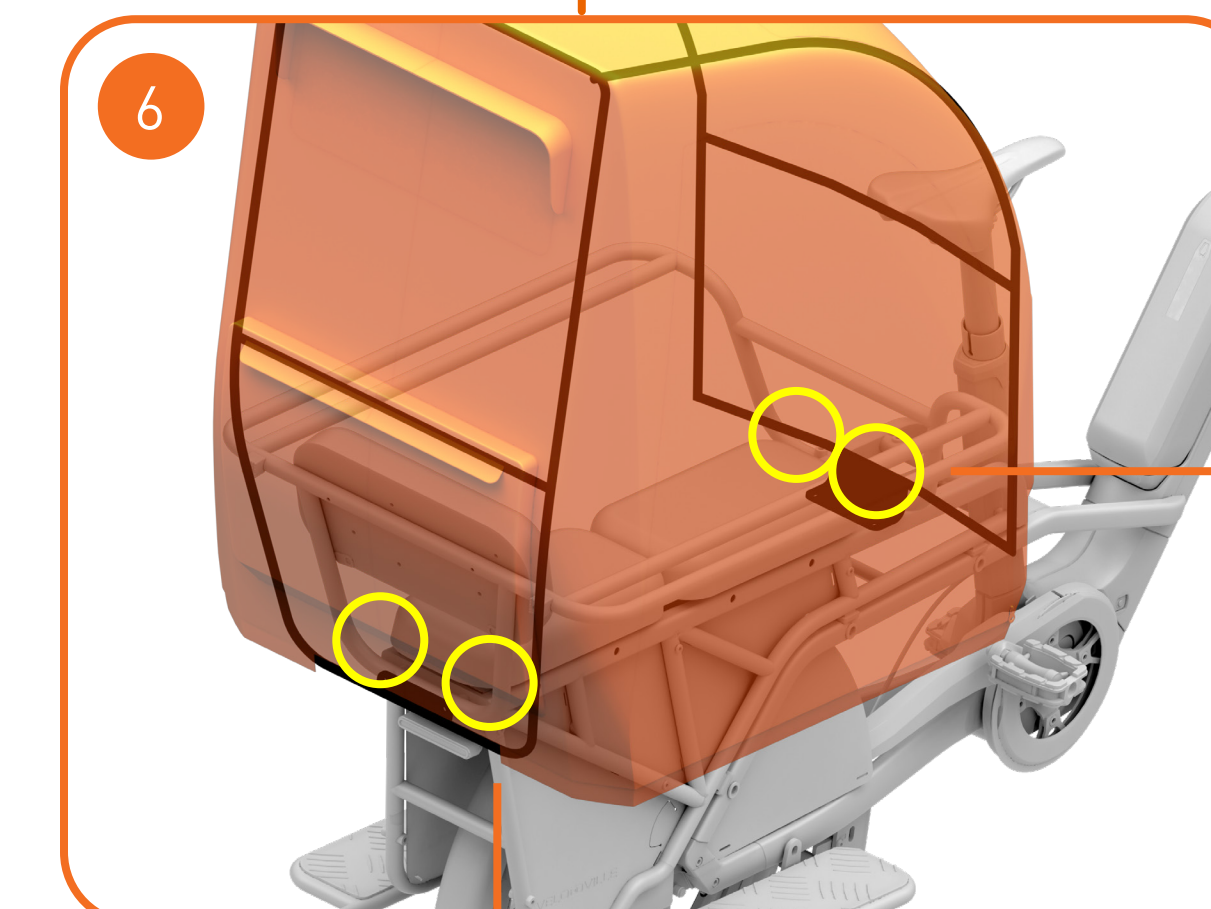


Front

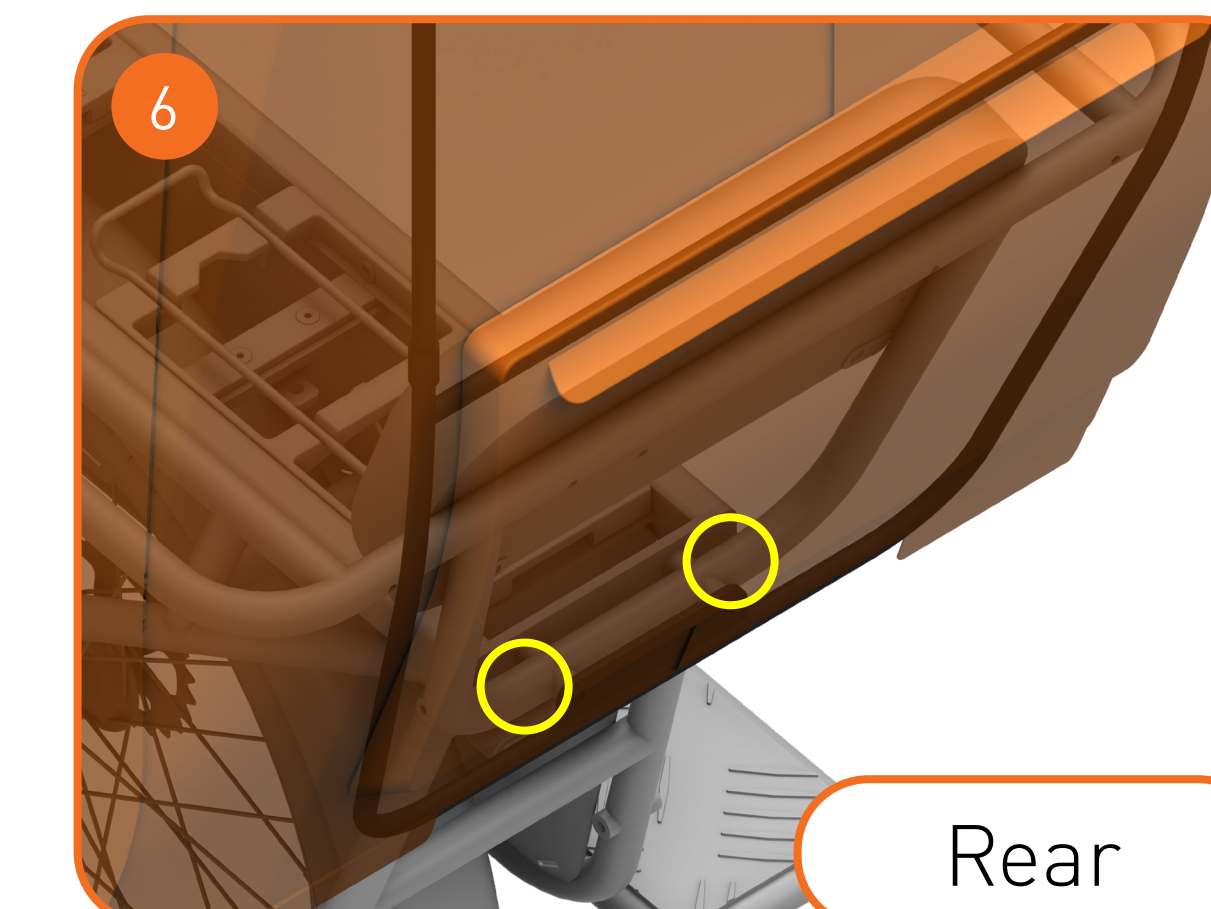


Rear

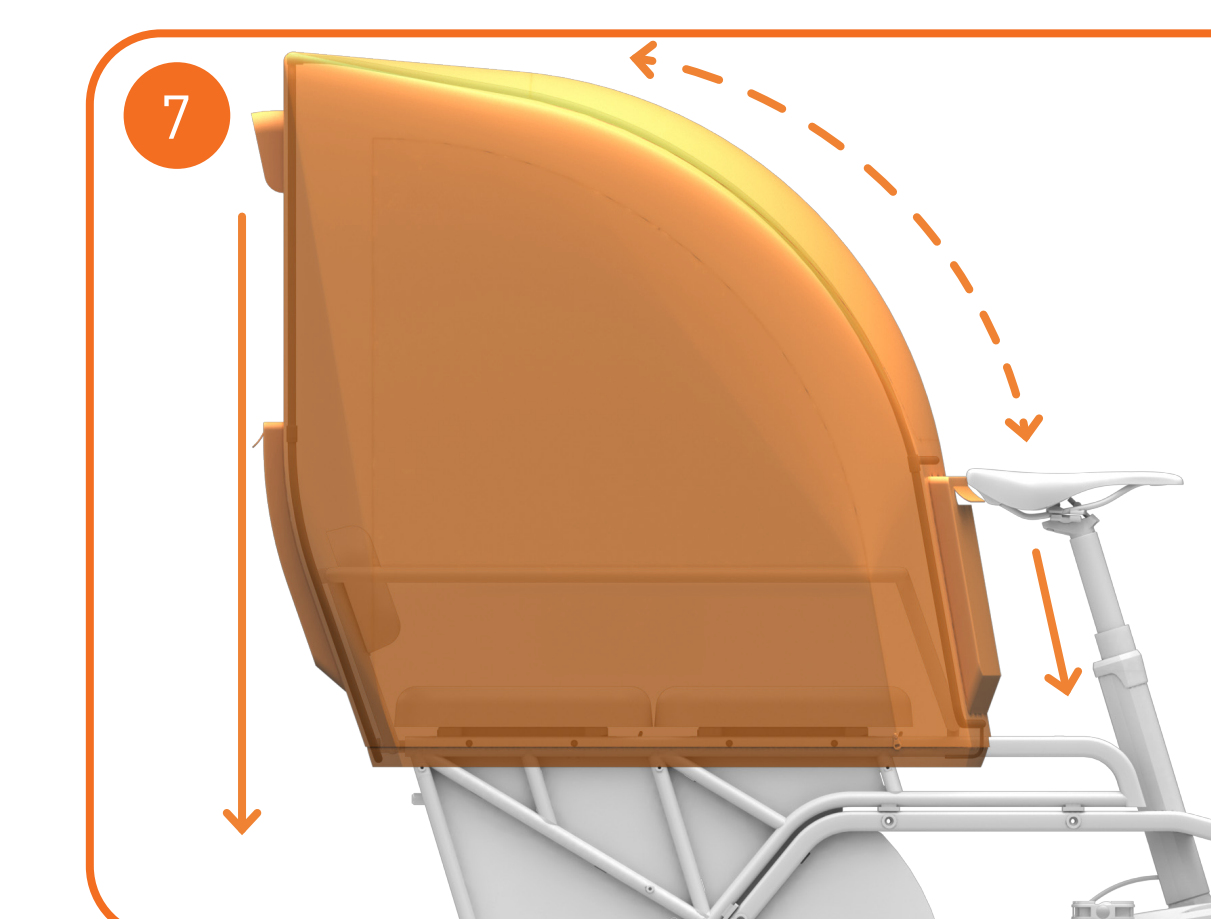

The weather cover must sit tightly. Before each ride, check that the frame and weather cover are attached securely.

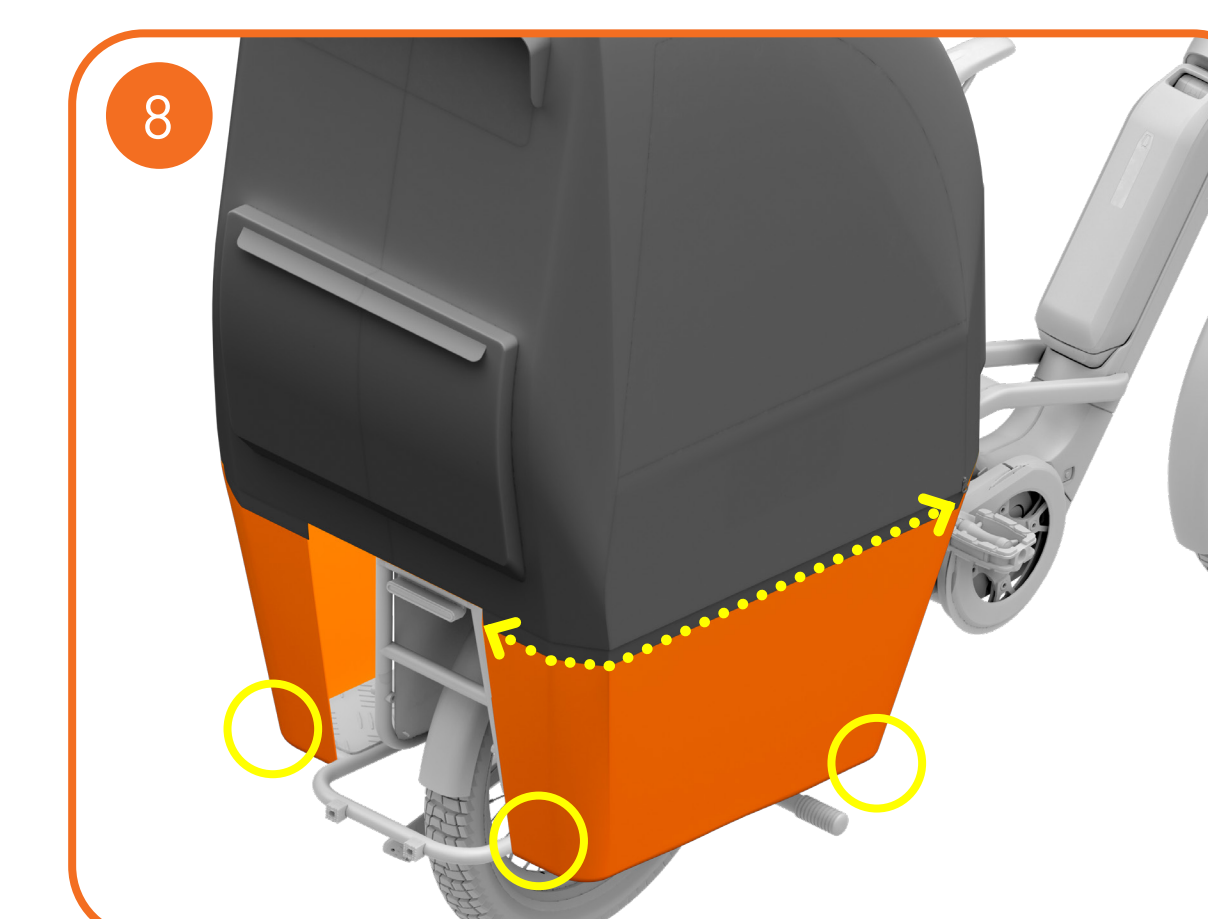

Fit the lower protection of the **WEATHER COVER** to provide protection from the weather in the feet area. Attach the lower protection to the **WEATHER COVER** with a zip, and to the footrest using a Velcro strap and bungee cord.

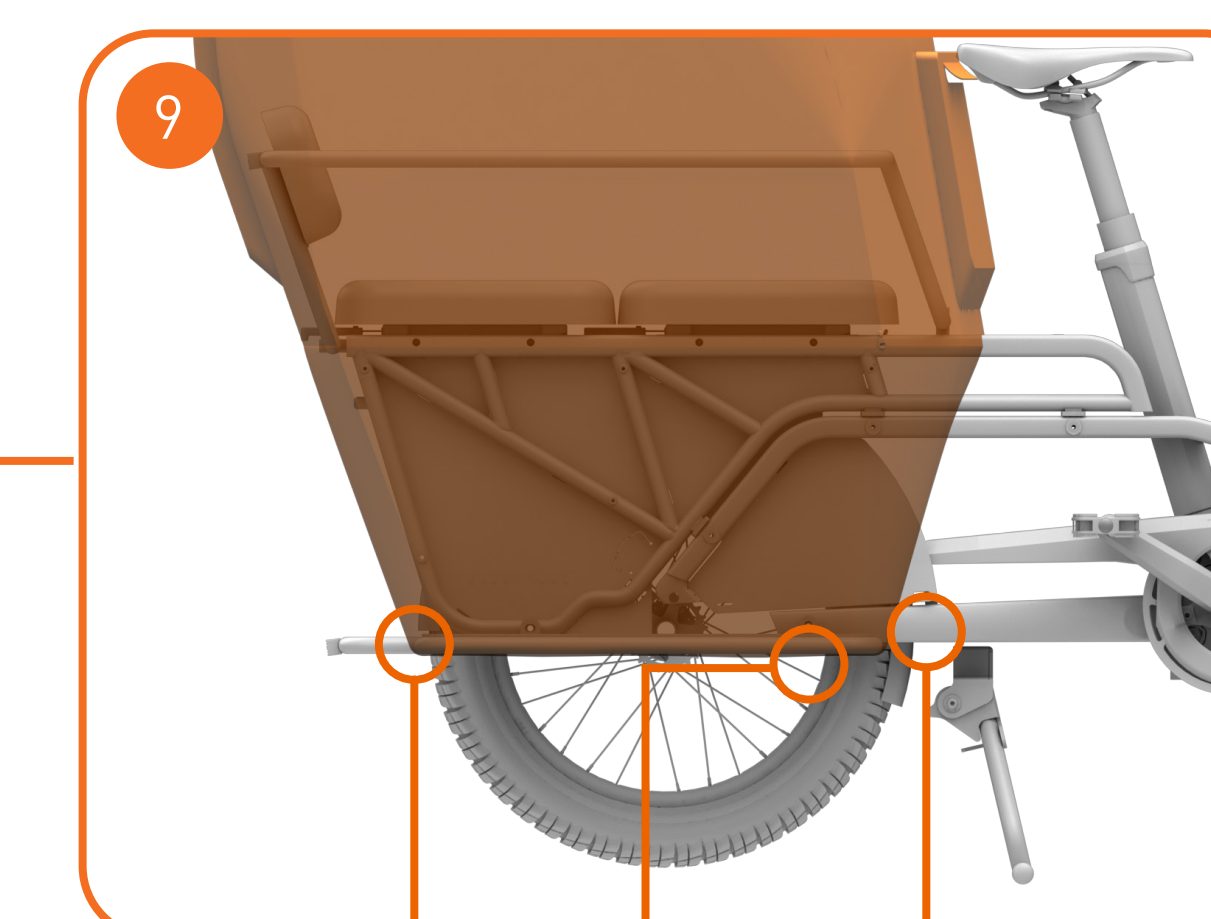

Bungee cord on the footrest
Velcro strap on the chainstay
Velcro strap on the footrest



WEATHER COVER

Art. no.: 189-99-02535

Installation instructions & information



INSTRUCTIONS



CONFIGURATOR

Edition: 29 September 2025
VELO DE VILLE
AT-Zweirad GmbH
Zur Steinkuhle 2
48341 Altenberge
Germany




You can open and roll up the side panels and the back panel and secure them with a strap for **ventilation** in the weather cover.



Caution! Risk of bumping on the frame!

Help children under 7 years of age to get in by lifting them through the window opening.

Secure and buckle in children under 7 years of age in a dedicated child seat.

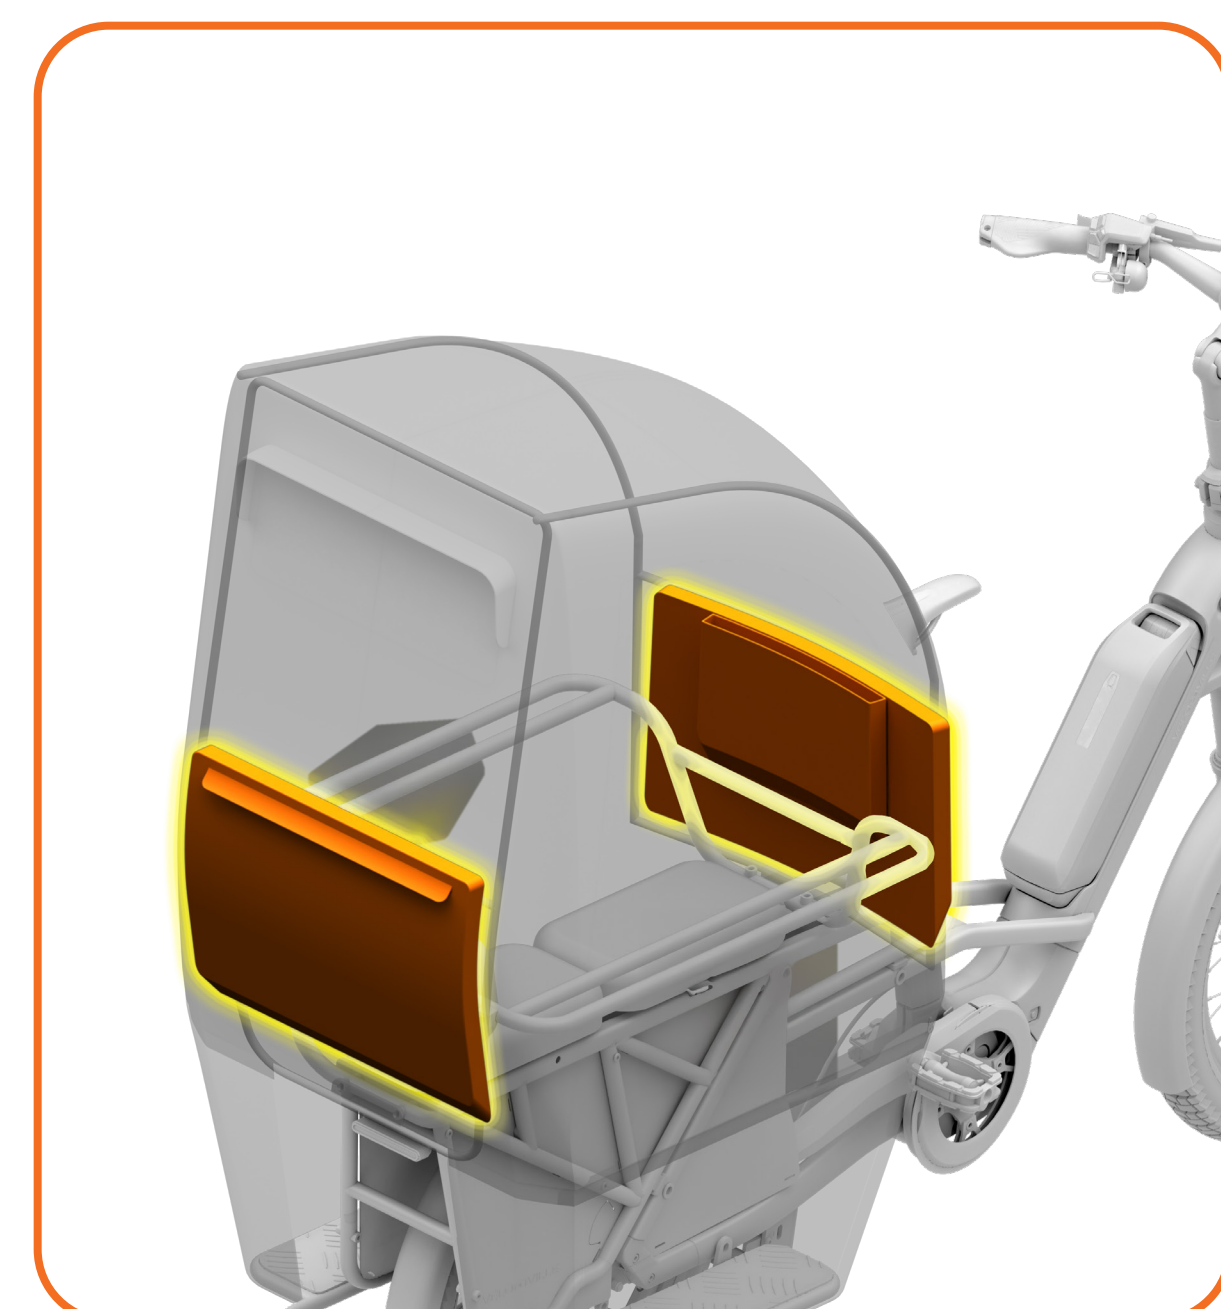


Use the **bags** (2 outside and 1 inside) to store smaller objects and accessories.

Each bag holds a maximum of 1 kg.




! The WEATHER COVER CANNOT be used with the Vario bar!

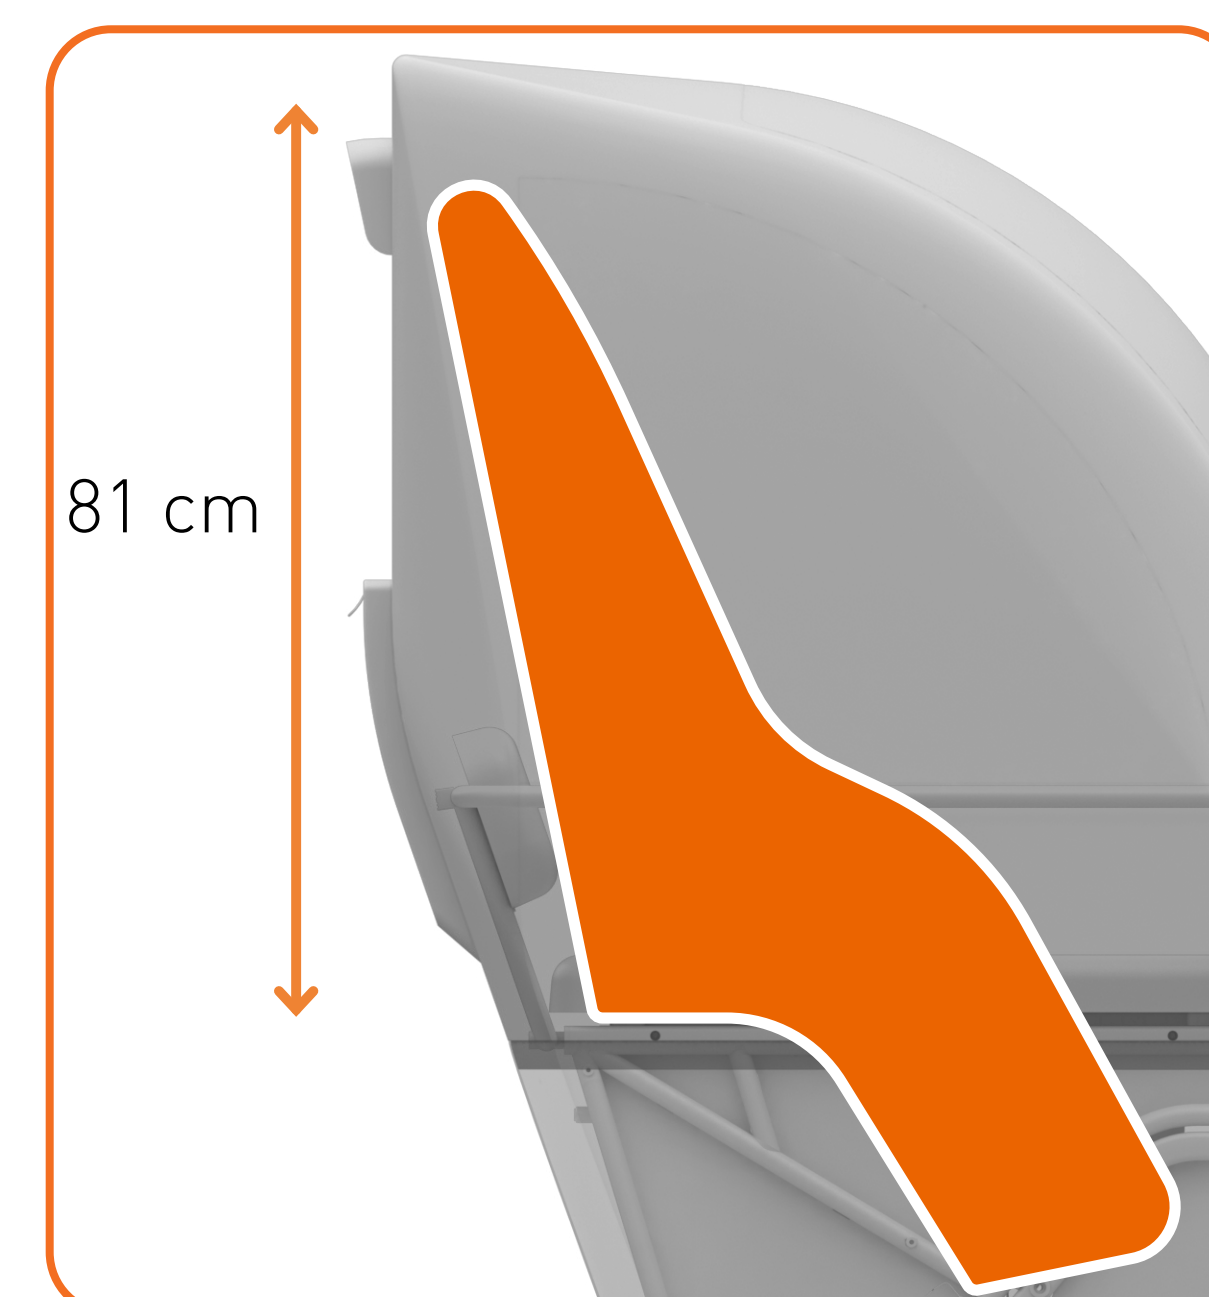

Child seats with an MIK-HD connector are compatible with the VELO DE VILLE rear carrier.

The interior height of the weather cover is approx. 81 cm WITHOUT seat cushion and approx. 75 cm WITH seat cushion.

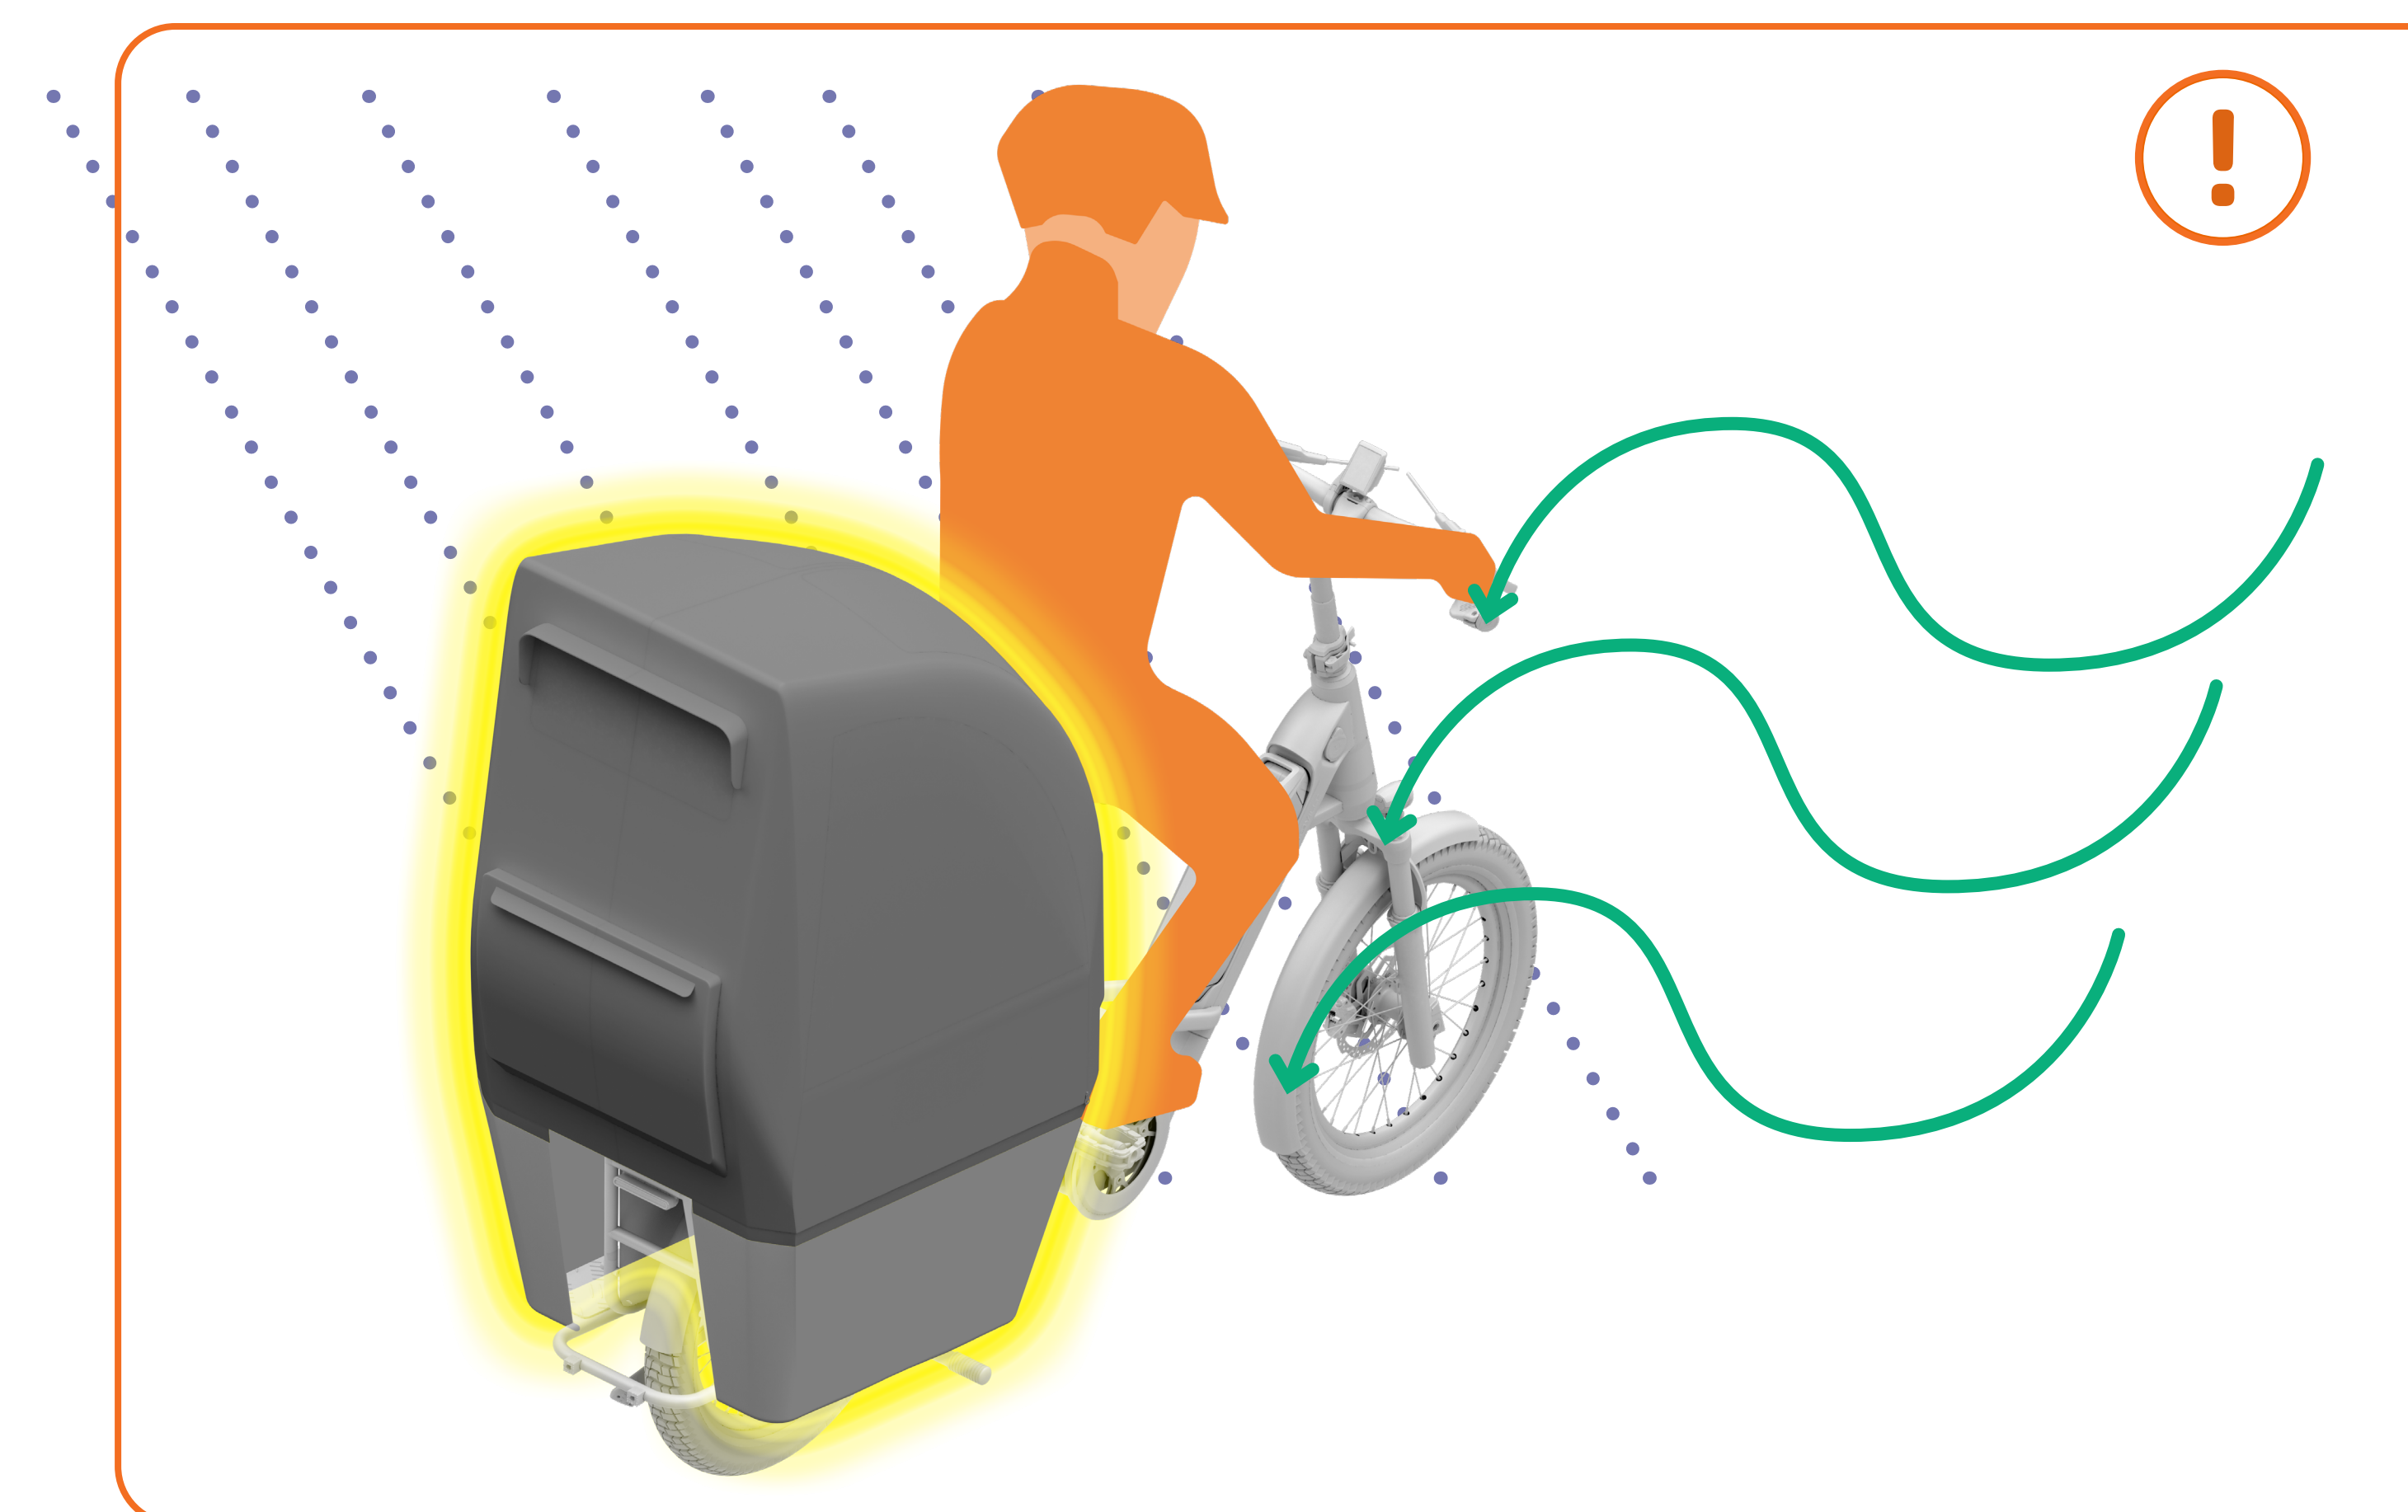


Note that the WEATHER COVER alters the riding characteristics of the VELO DE VILLE LOADY.

Wind and rain affect riding stability!

Practise riding with the WEATHER COVER fitted and without passengers until you feel more confident riding with it!

Enquire about riding training if you need to!

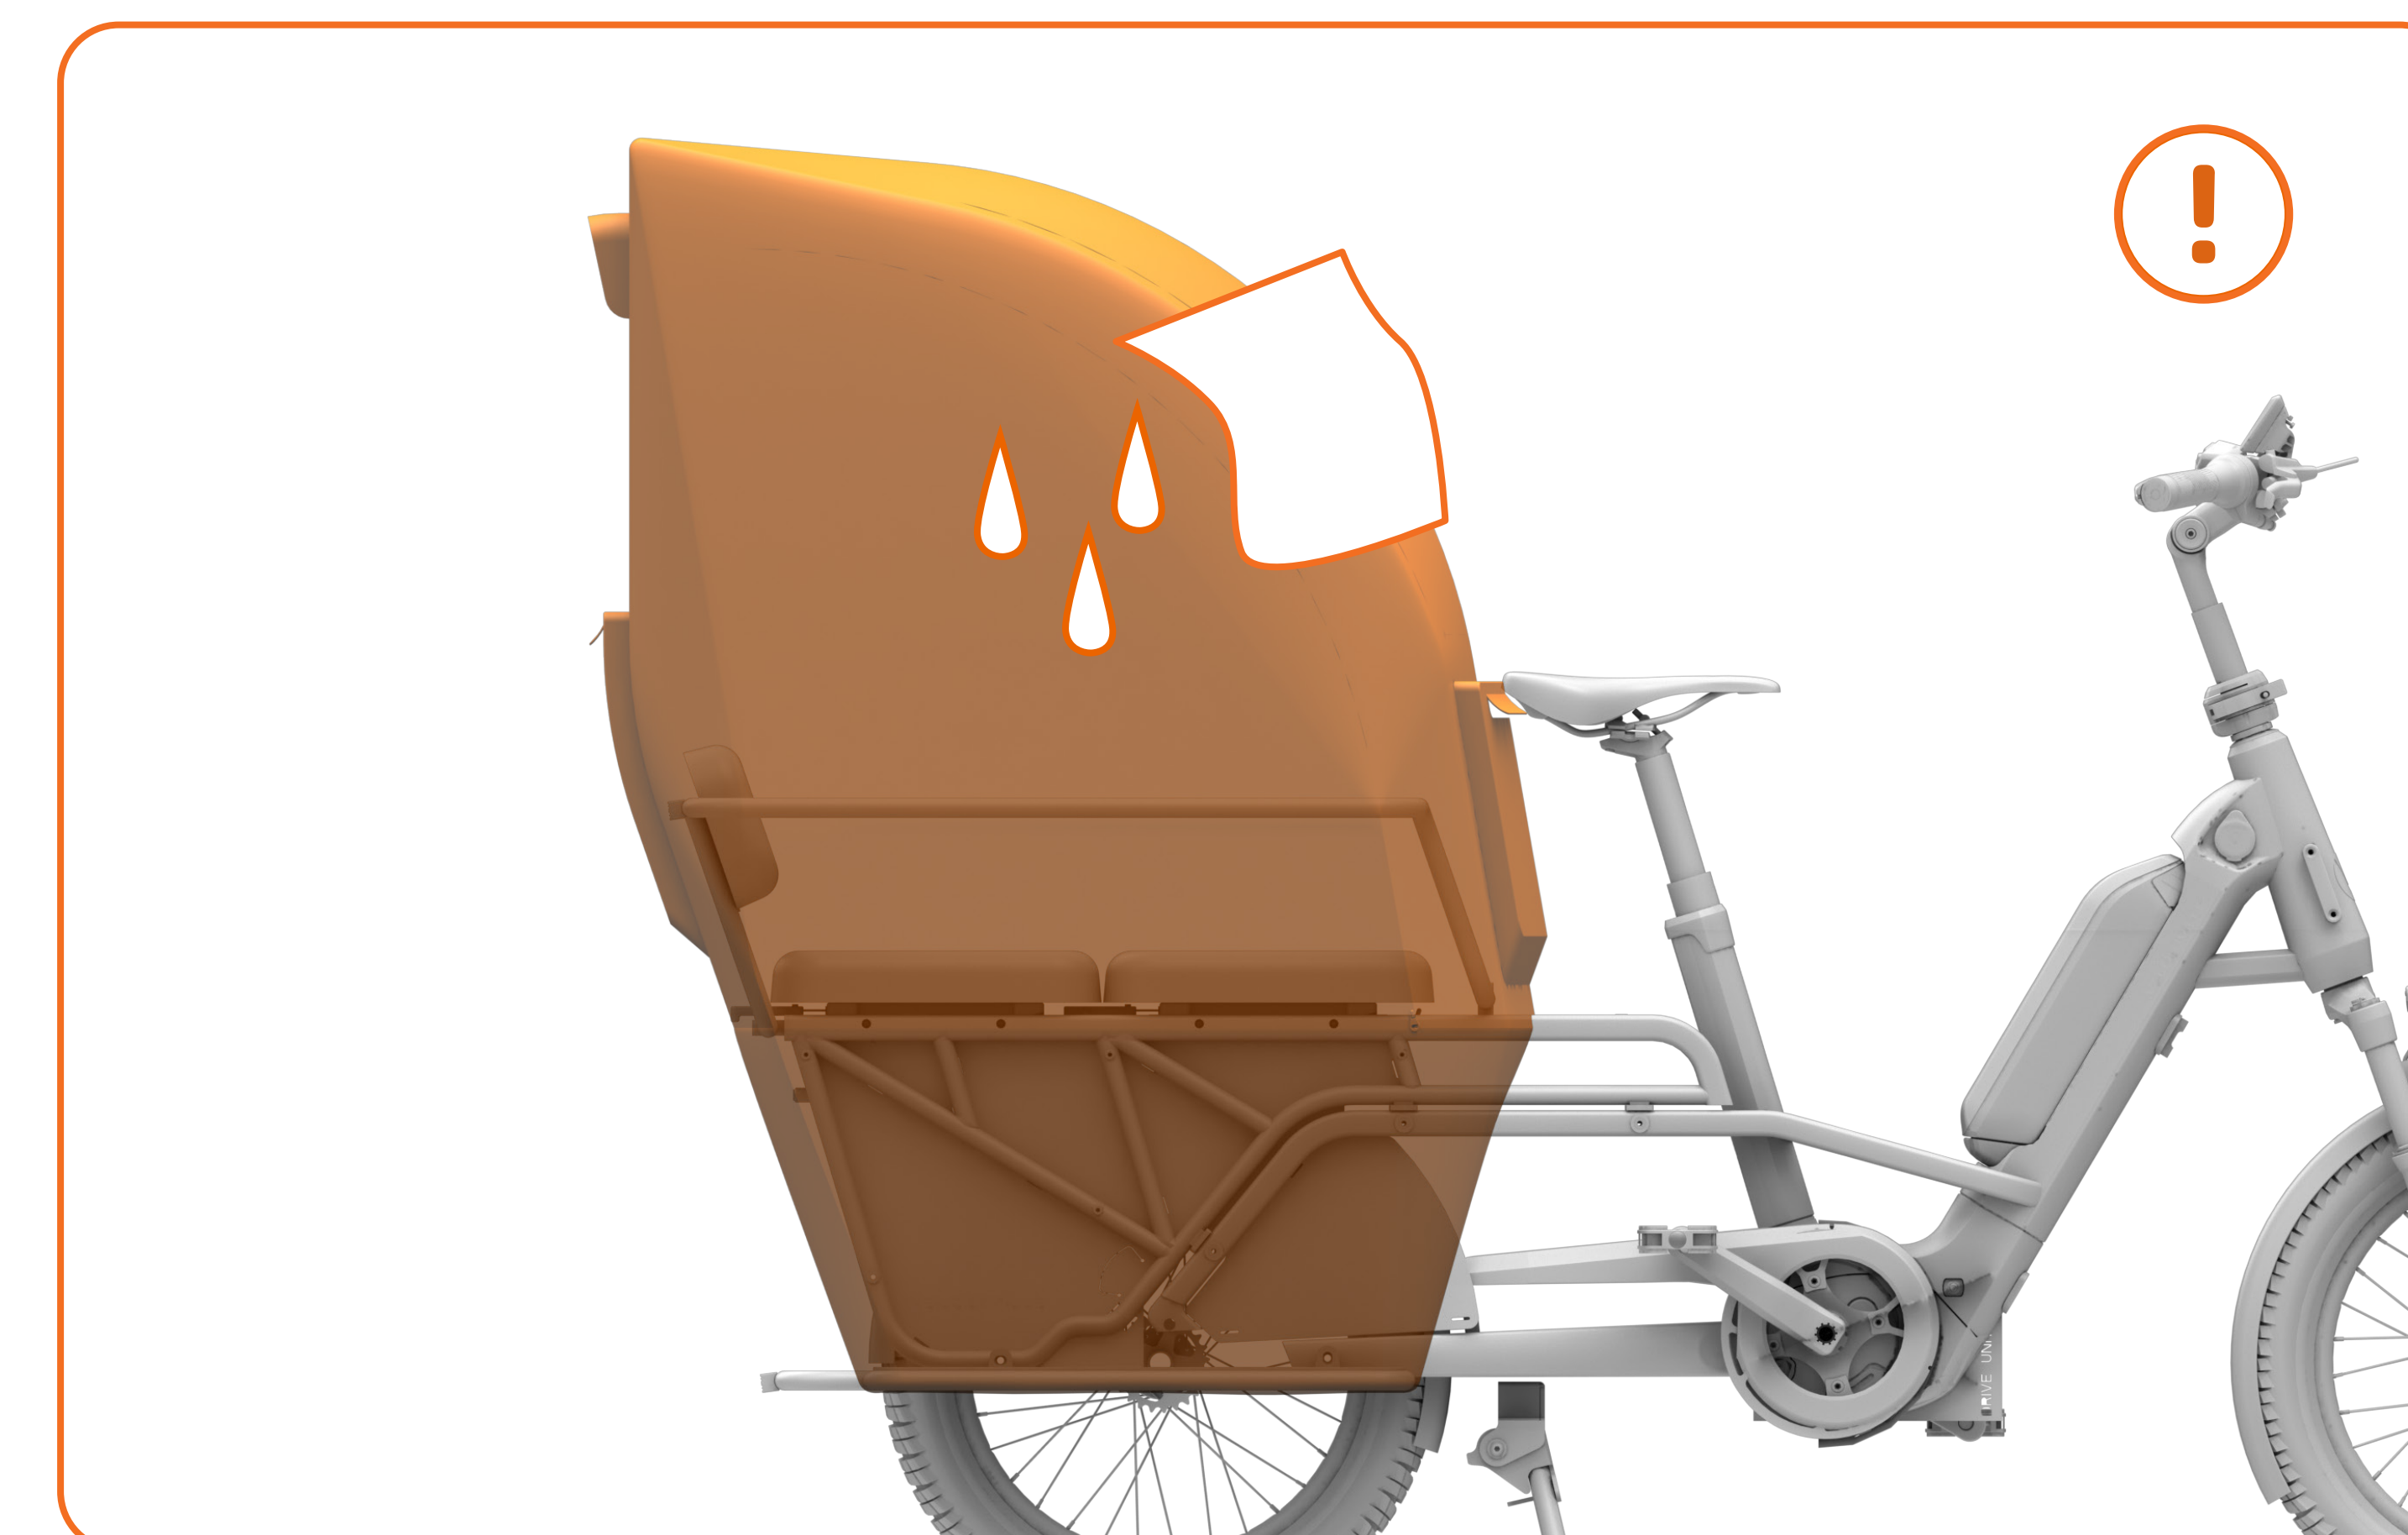

Follow the care instructions on the label of your VELO DE VILLE product for **care and cleaning information**

ALWAYS store the WEATHER COVER in a dry place!