

TRAILER ADAPTER PLATE MOUNTING

These instructions show how to fit and use the VELO DE VILLE trailer adapter plate on the LOADY


ALWAYS use a screw lock when installing screws. Preferably in the form of LOCTITE 243.

Set contents:


Screws + self-tapping nut Nut
1x M5 x 40 mm + nut
1x M6 x 45 mm + nut

LOADY trailer adapter plate
179-50-00019

Washers
1 x M5 washer
1 x M6 washer

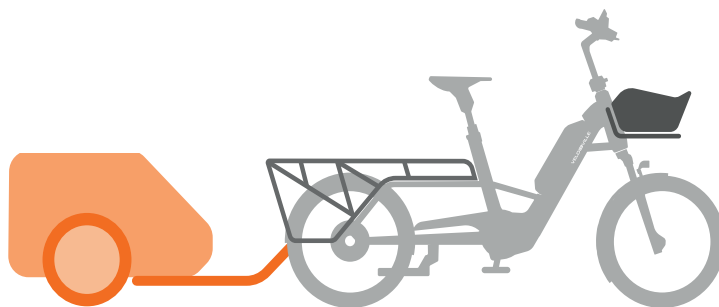

Loosen and remove the screw already fastened in the lower left area of the LOADY rear carrier.

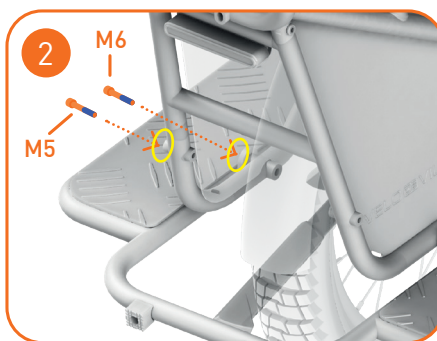


Now fasten the M5x40 + M5 U washer at the top with 5 NM.
At the bottom, the M6x45 + M6 U washer is fastened with 6-8 NM.



Now attach the trailer adapter plate to the inside of the rear luggage carrier using the previously fitted screws.




Now secure the trailer adapter plate with the M5 and M6 washers and the M5 (with 5 NM) and M6 (with 6-8 NM) self-locking nuts.

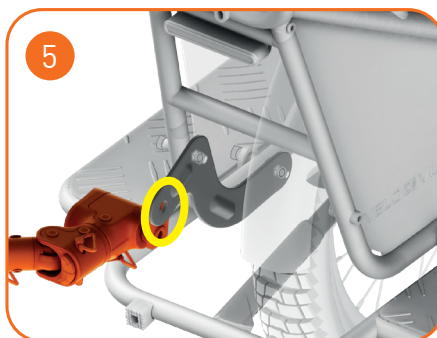



You can now attach the towbars from various suppliers, which are otherwise attached via an axle mount.
The opening in the trailer adapter plate is Ø10.5 mm (suitable for M10 bolts).

Observe the legal requirements for transporting children in bicycle trailers!

Germany; Switzerland	Austria
max. 2 children	max. 2 children
up to 6 years old	up to 6 years old
max. 45 kg permissible total weight of the trailer	max. 45 kg permissible total weight of the trailer
	Helmets are compulsory for children under the age of 12!

 The additional use of (child) trailers on your LOADY is permitted. For more information, visit our home-page: www.velo-de-ville.com or contact your VELO DE VILLE dealer.

 If a trailer is used, its own weight and the load are added to the payload of the maximum authorised total weight.

 Also make sure that all passengers in the (child) trailer are wearing a helmet and that it is properly fastened.

